

SPECIFICATION SHEET

Vinyl To Tile Capping



MADE IN THE UK



✓ Better Quality ✓ Better Value ✓ British Made

• T: 01543 500893 • F: 01543 500894 • E: sales@tilerite.co.uk • W: tilerite.co.uk

Product Description

Tile Rite Vinyl to Tile Capping provides a neat transition between Vinyl Flooring & Ceramic Tiles. These profiles allow for the floor covering to be continued up the wall for a neat and clean finish in wet and sanitised areas. Can be used in conjunction with Altro, linoleum and vinyl flooring.

Dimensions and Colour

Available in 8.2mm ledge depth and 2.44m lengths. Colour options available: White & Black.

Specification Drawings

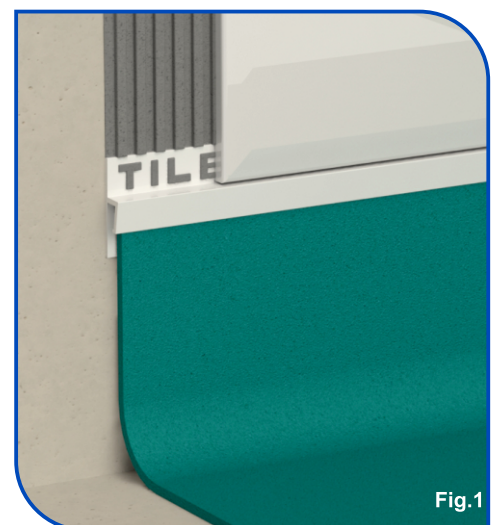
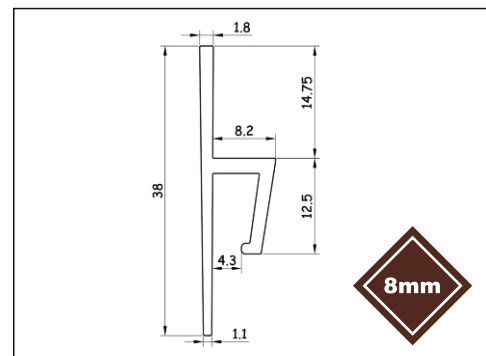


Fig.1

Technical Details

PVC is particularly suitable for a wide range of applications due to its excellent chemical resistance. Exceptions: Not recommended for use above 60°C. Resistant to most oils, alcohols, petrol and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitrocompounds, esters and cyclic ethers.

Maintenance

Tile Rite Vinyl To Tile Capping requires no special maintenance. Cleaned periodically using a PH neutral detergent to maintain the appearance. Regular cleaning aids the longevity of the profile and ensures there is no corrosion that could affect safety.

Installation

- 1 Select trim according to tile thickness.
- 2 Mark a level line on the wall at the maximum height of the floor covering and allow 14.75mm for the anchoring leg of the trim..
- 3 Cut trim to size.
- 4 Fill the back of the profile with tile adhesive and also apply adhesive to the wall where the profile will be installed using a notched trowel.
- 5 Press the profile into place and align.
- 6 Fit flooring and tiles as appropriate (See Fig.1).

CODE	LEDGE DEPTH	COLOUR
VTC056	8.2mm	White
VTC437	8.2mm	Black

GRADE: LG0000 - The raw material used in the manufacture of these products is calcium zinc stabilized formulation and contains no lead or substances of very high concern (SVHC). It is fully compliant with WEEE & R0HS Directives.

DESCRIPTION: Calcium Zinc stabilized Extrusion grade PVC, suitable for indoor use.

PROPERTIES	UNIT	TYPICAL RESULT	TEST METHOD
Specific Gravity (According to Colour)	G/cc	1.42	ASTM D692
Vicat Softening Point	°C	78	BS2782:120B
Apparent Modulus of Elasticity	MPa	2300	BS2782:335A
Tensile Strength	MPa	40	BS2782:320C
Impact Strength	KJ/M2	12	BS2782:359
Heat Stability	Mins	88	BS2782-130A